


LANCE – Rings and Pig Sticking

Attach nail first, then put washers & ball on dowel and test weight before gluing.



Washers used as counterweight, threaded onto wood dowel
Large washer has large hole, use a smaller washer inside to stabilize


Drill holes for dowel and nail the same size as dowel/nail for a tight fit. Put glue into holes, then on dowel/nail, hammer into place.

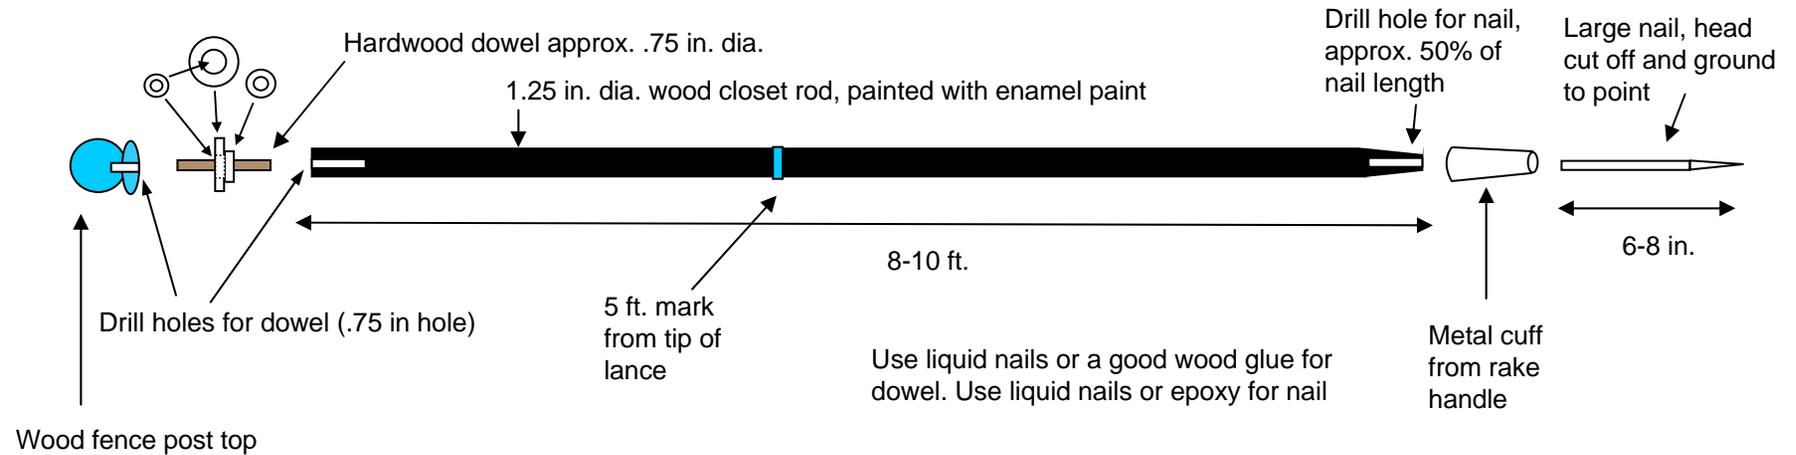

Large metal washers are from industrial tool supply store.

MACE

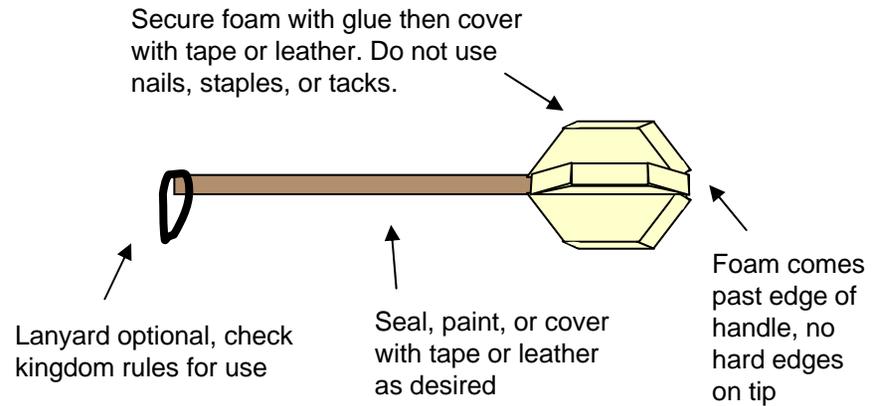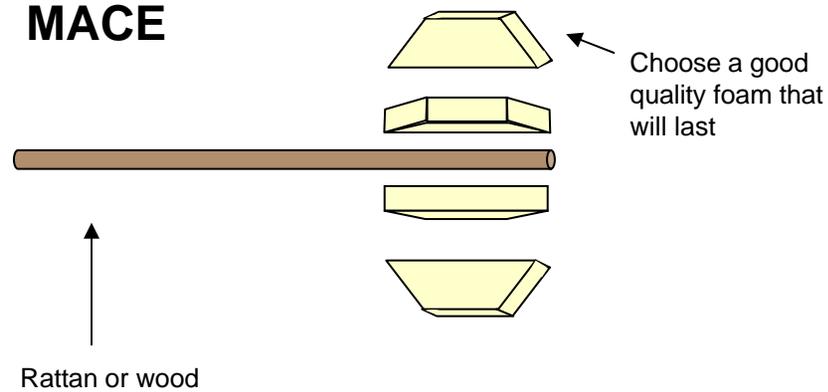


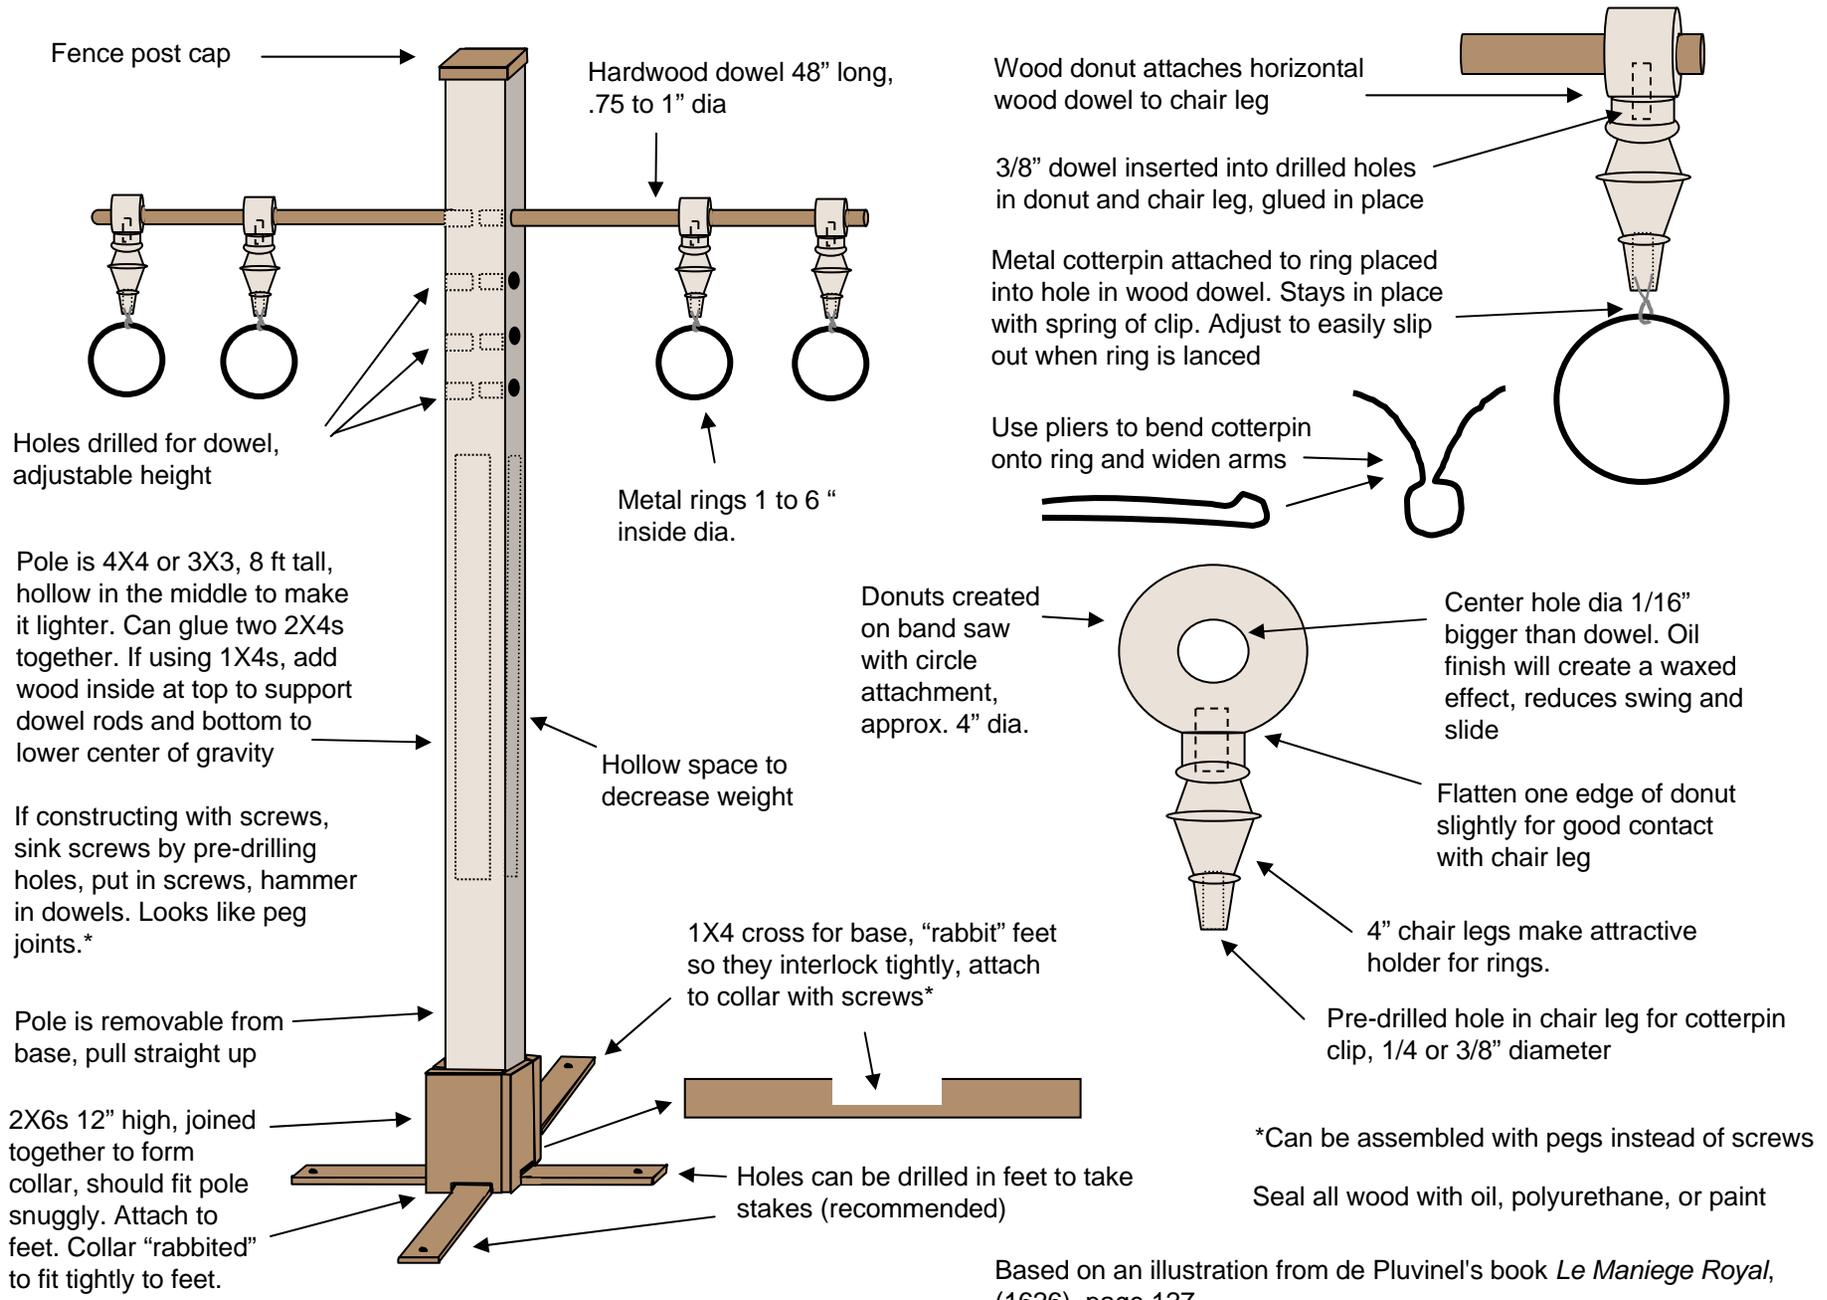


Based on an illustration from de Pluvinel's book *Le Maniege Royal*, (1626), page 127.

Lady Peryn, Meridies 2004


Throwing Javelin & Target

Connect the 2x4s with a bolt here, loosen to open/close angle to adjust height and fold flat for transport

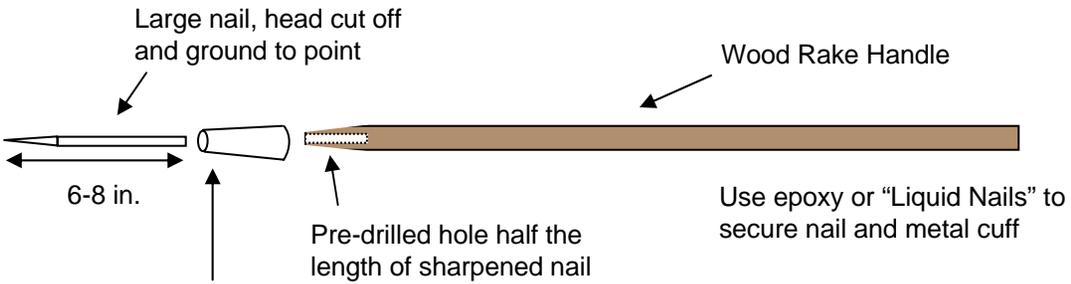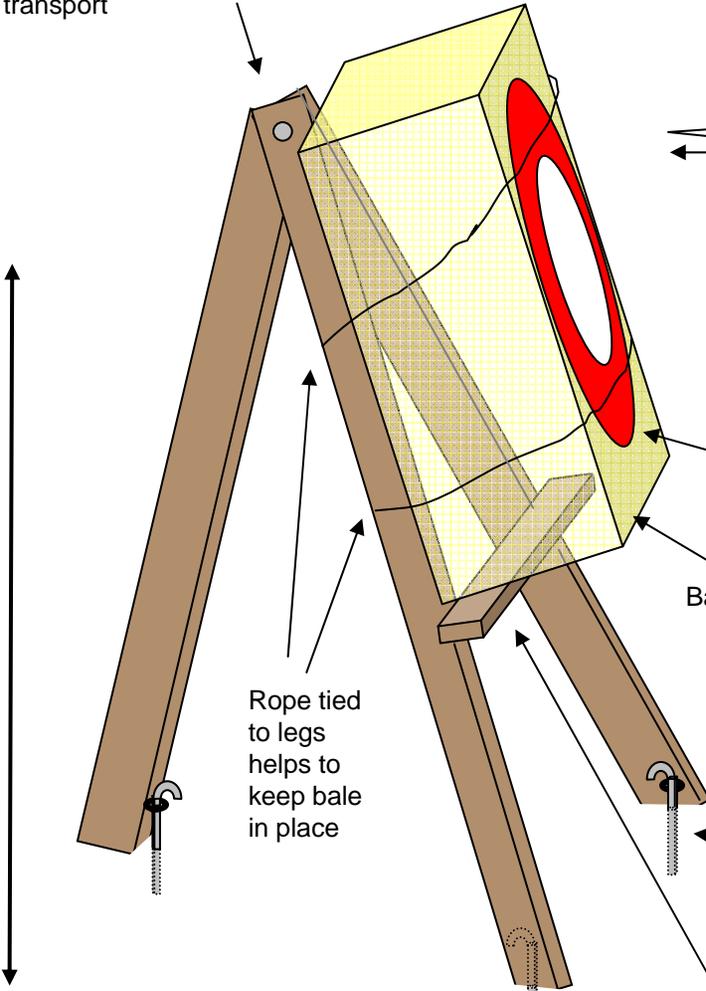

Large nail, head cut off and ground to point
6-8 in.
Metal cuff from rake handle
Paper target, homemade or archery target
Bale of straw

Wood Rake Handle
Use epoxy or "Liquid Nails" to secure nail and metal cuff

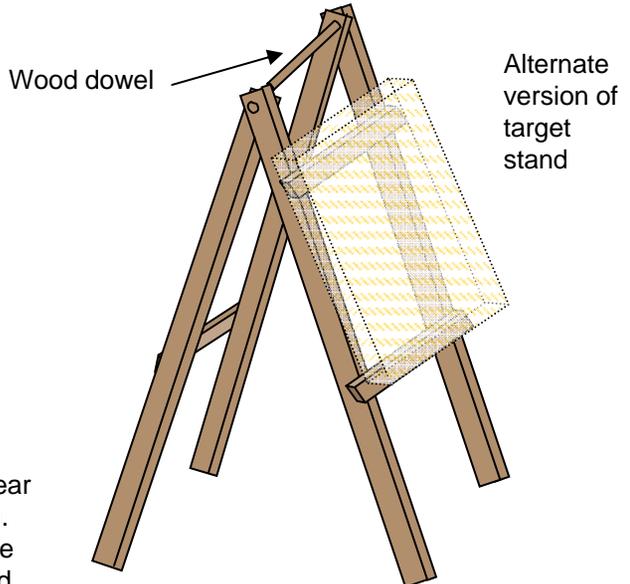

Alternate version of target stand

Rope tied to legs helps to keep bale in place

Stake legs for better stability

Place eye bolt in leg near ground on inside of leg. Drive stake through eye bolt to secure to ground. Tent stakes with a hook on top are effective.

Cross brace bolted to legs provides a shelf to support hay

Miter bottom of legs for better stability

Center of target should be about elbow height for average rider while mounted on average horse